

Bulldog[®] Recycling rotating nozzles

The **enz golden jet[®]** Bulldog Rotating Nozzle has been designed for operation with recycling water and fresh water. The cleverly built sliding bearing allows the use of every kind of recycled water. An integrated oil-free braking system results in a low wear and tear operation and in controlled numbers of rotation. In this way a most efficient and economic pipe cleaning is achieved. The bore of the nozzle insert determines the admissible size of the dirt particles up to a maximum \varnothing 1mm.

Transport and water costs are noticeably reduced.



Characteristics

- Easy to handle
- The tool is practically maintenance-free

Applications

- For operation with recycling water and fresh water

Working pressure up to 200 bar

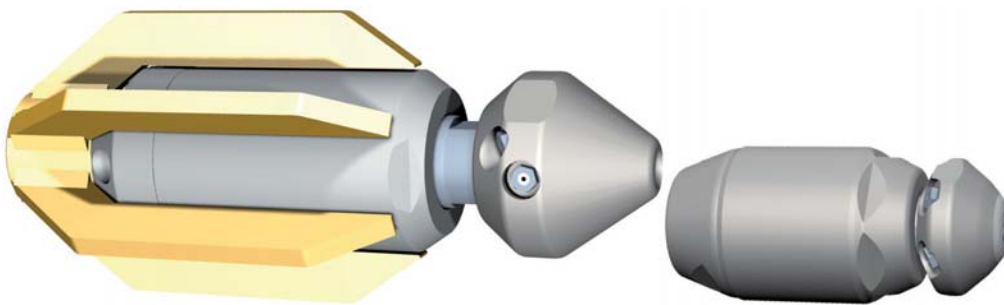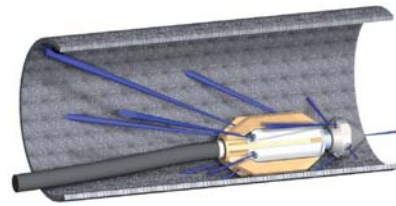

Bulldog® Recycling rotating nozzles

Bulldog® Rotating Nozzle 1/2" - 1 1/4"




400.037

00100.03720

400.060A

400.060B




1/2
40 - 200
40
6 × M6
*
1 × M6
37 × 83
0.42
x

1/2
75 - 200

60 × 110
0.25
x


3/4
100 - 300
100
6 × M8
6 × M8
1 × M8
60 × 150
2.04
x



402.080LS100 / 404.080HS100

402.080LS150 / 404.080HS150

400.080SET100 / 400.080SET150



1
125 - 400
100
6 × M10
(6 × M8)
1 × M10
100 × 225
3.7
x


1
125 - 400
100
6 × M10
Plug
1 × M10
100 × 225
3.7
x

LS = slow turning
HS = fast turning

High Performance Tool

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar		Measures [mm]		
	Rotating nozzles		Weight [kg]		

Bulldog® Recycling rotating nozzles



*Head HRH slow turning

00402.0805-4


ØxL 65 × 55

 0.63



Thrust stop*


00100.08073




*Head KBR fast turning

00404.0805-12










ØxL 65 × 55









 0.65



400.100A

400.100B

	1	1 1/4
	200 - 600	
	200	
	3 × M10	
	2 × M10 (from 300l/min)	
	6 × M10	
	1 × M10	
ØxL	117 × 256	
	7.60	
	x	

	Connecting thread ["]		Thrust jet		Recycling
	Application range [mm]		Front jet	*	Option
	min. l/min at 100 bar	ØxL	Measures [mm]		
	Rotating nozzles		Weight [kg]		

High Performance Tool 
